




Specification Decorative Discus™ **6706MS38U**

Page 1 of 1

Ceiling or ADA Wall Mounted 2D* Compact Fluorescent 1 Lt. 38W

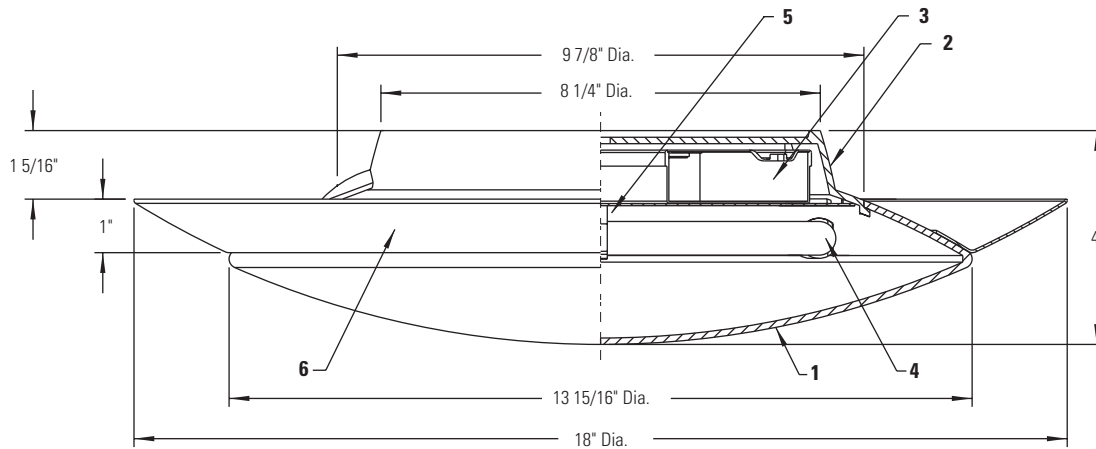

Ordering Information

Catalog No.	Finish	Wattage	Voltage	Lamping*
6706MS38U	Matte Silver	38W	120V-277V	F38/2D/827/4P Lightolier Catalog Number: 56943 F38/2D/835/4P Lightolier Catalog Number: 56944 *2D is a trademark of General Electric.

Features

- 1. Diffuser:** Acrylic, injection molded and bonded into one piece assembly; 0.12" minimum thickness; 70% light transmission. Lights evenly without discernible hot spots. Integral tabs provide "twist-lock" installation; no loose hardware, no tools required.
- 2. Housing:** Polycarbonate, injection molded. Shatter resistant. Integral bosses retain diffuser without loose hardware.
- 3. Ballast:** Electronic; High power factor; Class P. See Electrical/Ballast.
- 4. Lamp:** 2D CFL by GE. GR10Q-4 base.
- 5. Lamp Socket:** Polycarbonate, 4-Pin, GR10Q-4 base.
- 6. Trim Ring:** 16 gauge die formed aluminum. Brushed aluminum finish.

Mounting

Ceiling or wall (ADA compliant). Mounts to standard 4" outlet box.

Options

- Shatter resistant polycarbonate diffuser.
Add TP to end of catalog number.
+ Designates made to order only. Consult factory for lead times.

Electrical/Ballast

	38W Lamp	
	120v	277V
Total Input Watts:	33	33
Max. Line Current:	.29	.13
Power Factor:	>.98	>.98
Ballast Factor:	.80	.80
THD:	<10%	<10%
Starting Temp:	0°F	0°F

Labels

UL Listed, Suitable for Damp Locations.

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2003 Genlyte Thomas Group LLC (Lightolier Division) • B1003

LIGHTOLIER®